

Battery Specifications

PRODUCT NO	VOLTS	CCA	RC MINS	LENGTH	WIDTH	HEIGHT	NOMINAL	ACID	ASSEMBLY	TERMINAL
				mm	mm	mm	WEIGHT	LITRES		TYPE

PASSENGER/LIGHT TRUCK TYPES

NS40Z	12	320	52	194	127	225	10.7	2.2	D	SP
NS40ZMF	12	360	60	196	128	220	11.4	MF	D	SP
NS40ZL	12	320	52	194	127	225	10.7	2.2	C	SP
NS40ZLMF	12	360	60	196	128	220	11.4	MF	C	SP
NS40ZA	12	320	52	194	127	225	10.7	2.2	D	STD
NS40ZAMF	12	360	60	196	128	220	11.4	MF	D	STD
NS40ZAL	12	320	52	194	127	225	10.7	2.2	C	DF
NS40ZALMF	12	360	60	196	128	220	11.4	MF	C	DF

N41	12	320	52	236	130	200	10.6	3	D	STD
N43	12	320	52	236	130	200	10.6	3	C	DF

N40T	12	360	65	236	126	227	11.6	3.6	D	STD
N40TL	12	360	65	236	126	227	11.6	3.6	C	STD
NS60	12	360	65	236	126	227	12.6	3.6	D	SP
NS60L	12	360	65	236	126	227	12.6	3.6	C	SP

NS50ZH-400	12	400	76	240	175	210	14.8	3.9	D	STD
NS50ZLH-400	12	400	76	240	175	210	14.8	3.9	C	DF
NS50PMF	12	520	90	240	175	210	15.7	MF	D	STD
NS50PLMF	12	520	90	240	175	210	15.7	MF	C	STD
N51EB	12	440	95	240	175	210	16.2	3.8	C	DF
55D23RMF	12	520	90	226	170	220	15.7	MF	D	STD
55D23LMF	12	520	90	226	170	220	15.7	MF	C	STD
N58	12	500	110	250	185	180	15.6	3.7	D	STD
N58R	12	500	110	250	185	180	15.6	3.7	C	STD

4WD/TRUCK/TRACTOR/BUS TYPES

NS70	12	540	120	258	170	225	19.4	4.9	D	STD
N50ZMF	12	600	120	258	170	218	19.4	MF	D	STD
NS70L	12	540	120	258	170	225	19.4	4.9	C	STD
N50ZLMF	12	600	120	258	170	218	19.4	MF	C	STD
N70ZH-600	12	600	110	303	171	225	20.3	5.8	D	STD
N70ZLH-600	12	600	110	303	171	225	20.3	5.8	C	STD
N70ZZMF	12	700	140	303	171	225	22.2	MF	D	STD
N70ZZLMF	12	700	140	303	171	225	22.2	MF	C	STD
N87Z	12	650	140	350	174	239	25	6.4	C	STD
31A-700	12	700	140	330	172	240	24.3	MF	B	STD
31A-900	12	900	190	330	172	240	27	MF	B	STD
N94	12	850	300	507	206	203	40.7	10.4	E	STD
N27	6	850	300	300	174	200	23	6	A	STD
N100	12	680	180	407	174	239	27.4	6.5	D	STD
N120	12	800	230	507	182	237	35.2	11.2	F	STD
N150	12	950	300	507	222	237	42.3	12	F	STD
N200	12	1100	440	515	264	242	54	16.5	F	STD

Battery Specifications

PRODUCT NO	VOLTS	CCA	RC/Ah	LENGTH	WIDTH	HEIGHT	NOMINAL	ACID	ASSEMBLY	TERMINAL
				mm	mm	mm	WEIGHT	LITRES		TYPE






DIN TYPES

DIN44MF	12	420	65	208	175	175	12	MF	C	STD
DIN55MF	12	520	85	240	175	175	14.4	MF	C	STD
DIN55HMF	12	520	85	240	175	190	14.4	MF	C	STD
DIN66MF	12	620	105	278	175	175	16.7	MF	C	STD
PDIN77	12	650	125	310	175	175	19	4	C	STD
DIN88MF	12	720	105	352	175	190	21.4	MF	C	STD
DIN100	12	760	100	353	175	190	26.6	6	C	STD

TRACTION TYPES & OTHERS

D12	6		105	240	171	204	13.4	3.9	A	STD
U1-5	12		18	208	130	181	9.1	1.8	C	LUG
U1-9	12		24	208	130	181	9.1	1.8	C	LUG
U1-11	12		31	208	130	181	9.1	1.8	C	LUG
12N24-3	12	240	35	184	130	181	9.1	1.8	C	LUG
12N24-4	12	240	35	184	130	181	9.1	1.8	D	LUG

BATTERY ASSEMBLY TYPE

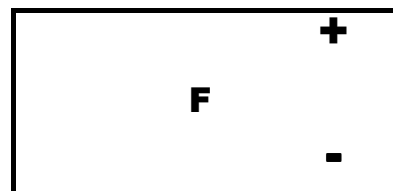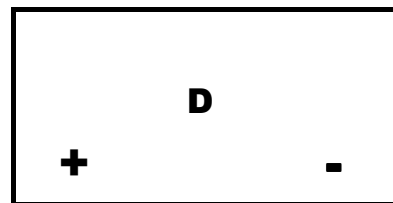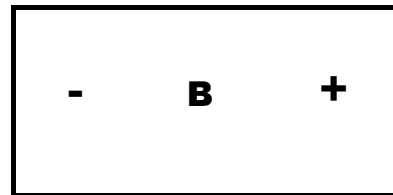

ABBREVIATION:

SP-SMALLPOST STD-STANDARD POST

WN-WING NUT TERMINAL DF-DUAL FIT TERMINAL